

SIGNIFICANT LIGHTING | ICONIC PROJECTS | BETTER BUSINESS

When your projects get ambitious don't think ordinary

The lighting we provide means you can present installations that deliver experiences your customers – and their users – haven't seen before. Whether subtle or in your face, this enables you to set new standards for visual impact, end-user satisfaction and low cost of ownership throughout high-profile spaces.

HERE&AFTER

info@hereandafter.com

hereandafter.com



PRODUCT DATASHEET

AXIS Downlight Spot 159mm

AX-DS3

Axis Downlight data sheet

Axis Downlight is a futuristic and minimalistic Downlight – With the characteristics from Axis spot, combined with a smooth and easy adjustment of both positioning as well as depth, Axis downlight stand out both in design and functionality. through a wide range of accessory, Axis downlight offer a wide range of applications option - only the imagination is the limit.

The Axis downlight structure is based on aluminium. The aluminium gives the spotlight an exceptionally good passive dissipation, which provide an exceedingly long lifespan. The ball bearing adjustment makes the depth adjustment run extremely smooth and swivel joints allow the spot to rotate 355° and tilted to both sides. With a high efficiency reflector or zoom, which is position deep in the spot, the Axis spot provide an elevated level of visual comfort and low glare.

DESIGNED BY ERIK PADKJÆR LARSEN

LED IP20    650° 

5 YEARS WARRANTY  




Other colours on request



Narrow
17

Medium
24

Wide
42

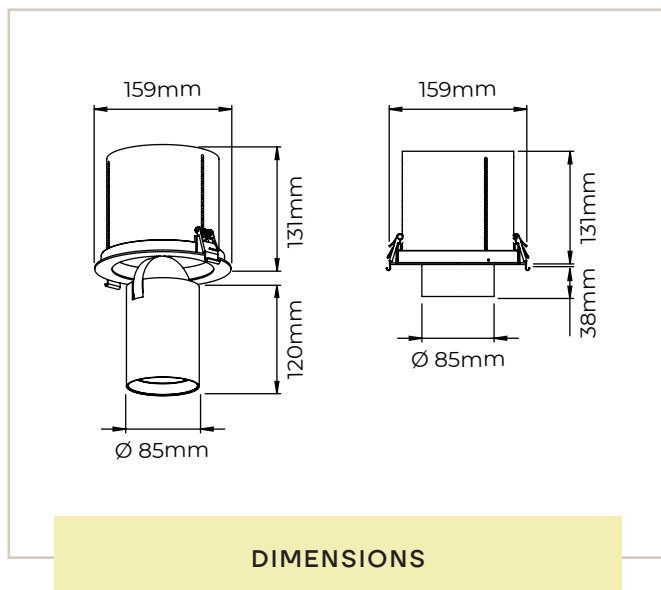

Light Technical Information

W source	24	Lamp Type	COB	Ripple (%)	<5
W system	28	Voltage (V)	31-37	Ballast losses (W)	/
lm source	2963/ 3093/ 3248/ 3398	LED Current (mA)	700	Control	Triac/DALI/0-10V
lm system	2519/ 2629/ 2761/ 2888	MacAdam Step	3	UGR	≤19
Lm/W	92/ 96/ 100/ 105	LED numbers	1	GWT (°C)	650
Lm in emergency mode	/	Tc (Ta25°C)	67	Rotation angle (°)	355
CCT	2700/ 3000/ 4000/ 5000	Life span LED	50000H L70B50	Tilting angle (°)	30
CRI	90	Power factor	PF>0.9	Cutout (mm)	Φ150
Lamp code	CXM-14-30-90-36-TC40	Minimum dimming (%)	1	Looping	/

Specification – 2700K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070071800001	5715174163363	Axis AX-DS3 24w CRI90 17°	2700K	92	2519	Sandy Black	RAL9004
12070070900001	5715174163370	Axis AX-DS3 24w CRI90 17°	2700K	92	2519	Sandy white	RAL9016
12070071800002	5715174163400	Axis AX-DS3 24w CRI90 24°	2700K	92	2519	Sandy Black	RAL9004
12070070900002	5715174163417	Axis AX-DS3 24w CRI90 24°	2700K	92	2519	Sandy white	RAL9016
12070071800003	5715174163448	Axis AX-DS3 24w CRI90 42°	2700K	92	2519	Sandy Black	RAL9004
12070070900003	5715174163455	Axis AX-DS3 24w CRI90 42°	2700K	92	2519	Sandy white	RAL9016

Specification – 3000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070071800004	5715174163486	Axis AX-DS3 24w CRI90 17°	3000K	96	2629	Sandy Black	RAL9004
12070070900004	5715174163493	Axis AX-DS3 24w CRI90 17°	3000K	96	2629	Sandy white	RAL9016
12070071800005	5715174163523	Axis AX-DS3 24w CRI90 24°	3000K	96	2629	Sandy Black	RAL9004
12070070900005	5715174163530	Axis AX-DS3 24w CRI90 24°	3000K	96	2629	Sandy white	RAL9016
12070071800006	5715174163561	Axis AX-DS3 24w CRI90 42°	3000K	96	2629	Sandy Black	RAL9004
12070070900006	5715174163578	Axis AX-DS3 24w CRI90 42°	3000K	96	2629	Sandy white	RAL9016

Specification – 4000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070071800007	5715174163608	Axis AX-DS3 24w CRI90 17°	4000K	100	2761	Sandy Black	RAL9004
12070070900007	5715174163615	Axis AX-DS3 24w CRI90 17°	4000K	100	2761	Sandy white	RAL9016
12070071800008	5715174163646	Axis AX-DS3 24w CRI90 24°	4000K	100	2761	Sandy Black	RAL9004
12070070900008	5715174163653	Axis AX-DS3 24w CRI90 24°	4000K	100	2761	Sandy white	RAL9016
12070071800009	5715174163684	Axis AX-DS3 24w CRI90 42°	4000K	100	2761	Sandy Black	RAL9004
12070070900009	5715174163691	Axis AX-DS3 24w CRI90 42°	4000K	100	2761	Sandy white	RAL9016

Specification – 5000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070071800010	5715174163721	Axis AX-DS3 24w CRI90 17°	5000K	105	2888	Sandy Black	RAL9004
12070070900010	5715174163738	Axis AX-DS3 24w CRI90 17°	5000K	105	2888	Sandy white	RAL9016
12070071800011	5715174163769	Axis AX-DS3 24w CRI90 24°	5000K	105	2888	Sandy Black	RAL9004
12070070900011	5715174163776	Axis AX-DS3 24w CRI90 24°	5000K	105	2888	Sandy white	RAL9016
12070071800012	5715174163806	Axis AX-DS3 24w CRI90 42°	5000K	105	2888	Sandy Black	RAL9004
12070070900012	5715174163813	Axis AX-DS3 24w CRI90 42°	5000K	105	2888	Sandy white	RAL9016