

SIGNIFICANT LIGHTING | ICONIC PROJECTS | BETTER BUSINESS

## When your projects get ambitious don't think ordinary

The lighting we provide means you can present installations that deliver experiences your customers – and their users – haven't seen before. Whether subtle or in your face, this enables you to set new standards for visual impact, end-user satisfaction and low cost of ownership throughout high-profile spaces.

**HERE&AFTER**

[info@hereandafter.com](mailto:info@hereandafter.com)

[hereandafter.com](http://hereandafter.com)



### Axis spot data sheet


Axis spot is a futuristic and minimalistic adjustable spotlight – Through the unique adaptor, filled with innovative technology - well tucked away inside the track, Axis spot stand out both in design and functionality. With a wide range of accessory, Axis offer a wide range of applications option - only the imagination is the limit.

The Axis spot structure is based on aluminium and thermoplastic. The aluminium gives the spotlight an exceptionally good passive dissipation, which provide an exceedingly long lifespan. In the thermoplastic adaptor, there is a High frequency Dali driver, with low in-rush current. The swivel joints allow the spot to rotate 355° and tilted to both sides. With a high efficiency reflector or zoom, which is position deep in the spot, the Axis spot provide an elevated level of visual comfort and low glare.

### DESIGNED BY ERIK PADKJÆR LARSEN




Other colours on request

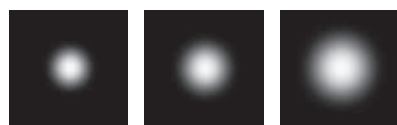

Narrow  
17

Medium  
24

Wide  
36

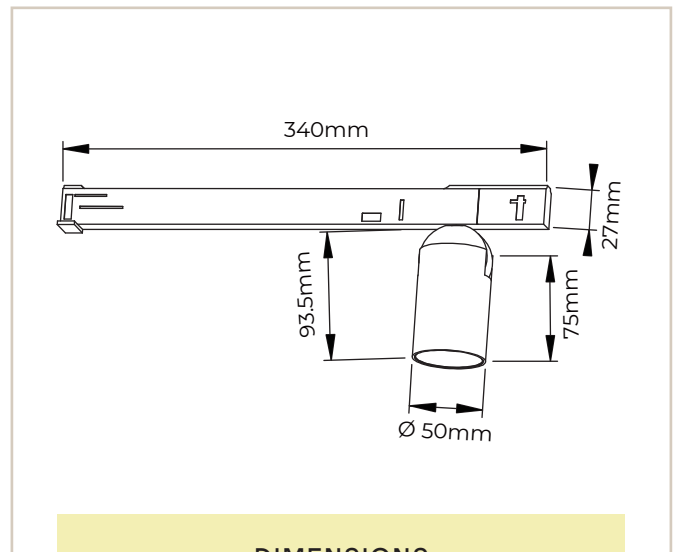

DIMENSIONS

### Light Technical Information

<b>W source</b>	7	<b>Lamp Type</b>	COB	<b>Ripple (%)</b>	<5
<b>W system</b>	8	<b>Voltage (V)</b>	31-37	<b>Ballast losses (W)</b>	/
<b>lm source</b>	808/ 853/ 905/ 911	<b>LED Current (mA)</b>	200	<b>Control</b>	DALI
<b>lm system</b>	687/725/ 769/ 774	<b>MacAdam Step</b>	3	<b>UGR</b>	12
<b>Lm/W</b>	86/ 91/ 96/ 97	<b>LED numbers</b>	1	<b>GWT ( C )</b>	650
<b>Lm in emergency mode</b>	/	<b>Tc (Ta25 C)</b>	75	<b>Rotation angle (°)</b>	355
<b>CCT</b>	2700/ 3000/ 4000/ 5000	<b>Life span LED</b>	50000H L70B50	<b>Tilting angle (°)</b>	70
<b>CRI</b>	90	<b>Power factor</b>	PF>0.9	<b>Cutout (mm)</b>	/
<b>Lamp code</b>	CXM-6-30-90-36-TC40	<b>Minimum dimming (%)</b>	0-100	<b>Looping</b>	/

## Specification – 2700K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070021800001	5715174160003	Axis AX-S1 7w CRI90 17°	2700K	86	687	Sandy Black	RAL9004
12070020900001	5715174160010	Axis AX-S1 7w CRI90 17°	2700K	86	687	Sandy white	RAL9016
12070021800002	5715174160041	Axis AX-S1 7w CRI90 24°	2700K	86	687	Sandy Black	RAL9004
12070020900002	5715174160058	Axis AX-S1 7w CRI90 24°	2700K	86	687	Sandy white	RAL9016
12070021800003	5715174160089	Axis AX-S1 7w CRI90 36°	2700K	86	687	Sandy Black	RAL9004
12070020900003	5715174160096	Axis AX-S1 7w CRI90 36°	2700K	86	687	Sandy white	RAL9016

## Specification – 3000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070021800007	5715174160126	Axis AX-S1 7w CRI90 17°	3000K	91	725	Sandy Black	RAL9004
12070020900007	5715174160133	Axis AX-S1 7w CRI90 17°	3000K	91	725	Sandy white	RAL9016
12070021800008	5715174160164	Axis AX-S1 7w CRI90 24°	3000K	91	725	Sandy Black	RAL9004
12070020900008	5715174160171	Axis AX-S1 7w CRI90 24°	3000K	91	725	Sandy white	RAL9016
12070021800009	5715174160201	Axis AX-S1 7w CRI90 36°	3000K	91	725	Sandy Black	RAL9004
12070020900009	5715174160218	Axis AX-S1 7w CRI90 36°	3000K	91	725	Sandy white	RAL9016

## Specification – 4000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070021800013	5715174160249	Axis AX-S1 7w CRI90 17°	4000K	96	769	Sandy Black	RAL9004
12070020900013	5715174160256	Axis AX-S1 7w CRI90 17°	4000K	96	769	Sandy white	RAL9016
12070021800014	5715174160287	Axis AX-S1 7w CRI90 24°	4000K	96	769	Sandy Black	RAL9004
12070020900014	5715174160294	Axis AX-S1 7w CRI90 24°	4000K	96	769	Sandy white	RAL9016
12070021800015	5715174160324	Axis AX-S1 7w CRI90 36°	4000K	96	769	Sandy Black	RAL9004
12070020900015	5715174160331	Axis AX-S1 7w CRI90 36°	4000K	96	769	Sandy white	RAL9016

## Specification – 5000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070021800019	5715174160362	Axis AX-S1 7w CRI90 17°	5000K	97	774	Sandy Black	RAL9004
12070020900019	5715174160379	Axis AX-S1 7w CRI90 17°	5000K	97	774	Sandy white	RAL9016
12070021800020	5715174160409	Axis AX-S1 7w CRI90 24°	5000K	97	774	Sandy Black	RAL9004
12070020900020	5715174160416	Axis AX-S1 7w CRI90 24°	5000K	97	774	Sandy white	RAL9016
12070021800021	5715174160447	Axis AX-S1 7w CRI90 36°	5000K	97	774	Sandy Black	RAL9004
12070020900021	5715174160454	Axis AX-S1 7w CRI90 36°	5000K	97	774	Sandy white	RAL9016