

SIGNIFICANT LIGHTING | ICONIC PROJECTS | BETTER BUSINESS

When your projects get ambitious don't think ordinary

The lighting we provide means you can present installations that deliver experiences your customers – and their users – haven't seen before. Whether subtle or in your face, this enables you to set new standards for visual impact, end-user satisfaction and low cost of ownership throughout high-profile spaces.

HERE&AFTER

info@hereandafter.com

hereandafter.com



Axis spot data sheet

Axis spot is a futuristic and minimalistic adjustable spotlight – Through the unique adaptor, filled with innovative technology – well tucked away inside the track, Axis spot stand out both in design and functionality. With a wide range of accessory, Axis offer a wide range of applications option - only the imagination is the limit.

The Axis spot structure is based on aluminium and thermoplastic. The aluminium gives the spotlight an exceptionally good passive dissipation, which provide an exceedingly long lifespan. In the thermoplastic adaptor, there is a High frequency Dali driver, with low in-rush current. The swivel joints allow the spot to rotate 355° and tilted to both sides. With a high efficiency reflector or zoom, which is position deep in the spot, the Axis spot provide an elevated level of visual comfort and low glare.

DESIGNED BY ERIK PADKJÆR LARSEN

LED IP20 650°

5 YEARS WARRANTY




Other colours on request



Narrow 17

Medium 24

Wide 36

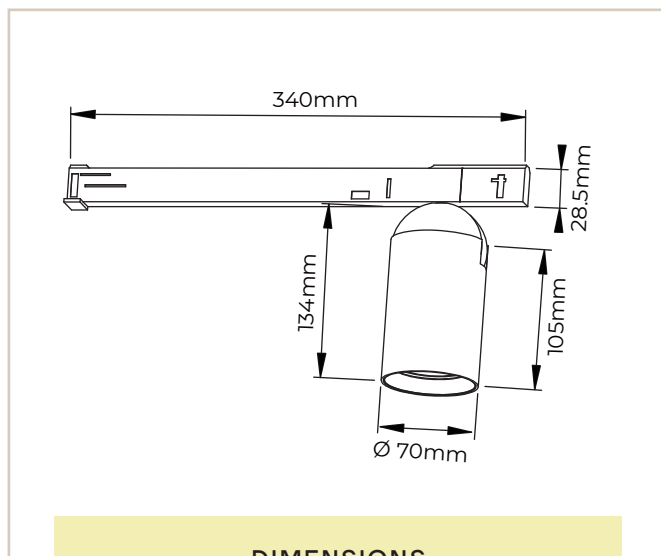

DIMENSIONS

Light Technical Information

W source	17	Lamp Type	COB	Ripple (%)	<5
W system	20	Voltage (V)	31-37	Ballast losses (W)	/
lm source	2051/ 2140/ 2249/2352	LED Current (mA)	500	Control	DALI
lm system	1744/1819/ 1912/1999	MacAdam Step	3	UGR	≤19
Lm/W	86/ 90/ 95/99	LED numbers	1	GWT (C)	650
Lm in emergency mode	/	Tc (Ta25 C)	75	Rotation angle (°)	355
CCT	2700/ 3000/ 4000/ 5000	Life span LED	50000H L70B50	Tilting angle (°)	70
CRI	90	Power factor	PF>0.9	Cutout (mm)	/
Lamp code	CXM-9-30-90-36-TC40	Minimum dimming (%)	0-100	Looping	/

Specification – 2700K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070011800003	5715174161123	Axis AX-S3 17w CRI90 17°	2700K	86	1744	Sandy Black	RAL9004
12070010900003	5715174161130	Axis AX-S3 17w CRI90 17°	2700K	86	1744	Sandy white	RAL9016
12070011800004	5715174161161	Axis AX-S3 17w CRI90 24°	2700K	86	1744	Sandy Black	RAL9004
12070010900004	5715174161178	Axis AX-S3 17w CRI90 24°	2700K	86	1744	Sandy white	RAL9016
12070011800005	5715174161208	Axis AX-S3 17w CRI90 36°	2700K	86	1744	Sandy Black	RAL9004
12070010900005	5715174161215	Axis AX-S3 17w CRI90 36°	2700K	86	1744	Sandy white	RAL9016

Specification – 3000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070011800009	5715174161246	Axis AX-S3 17w CRI90 17°	3000K	90	1819	Sandy Black	RAL9004
12070010900009	5715174161253	Axis AX-S3 17w CRI90 17°	3000K	90	1819	Sandy white	RAL9016
12070011800010	5715174161284	Axis AX-S3 17w CRI90 24°	3000K	90	1819	Sandy Black	RAL9004
12070010900010	5715174161291	Axis AX-S3 17w CRI90 24°	3000K	90	1819	Sandy white	RAL9016
12070011800011	5715174161321	Axis AX-S3 17w CRI90 36°	3000K	90	1819	Sandy Black	RAL9004
12070010900011	5715174161338	Axis AX-S3 17w CRI90 36°	3000K	90	1819	Sandy white	RAL9016

Specification – 4000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070011800015	5715174161369	Axis AX-S3 17w CRI90 17°	4000K	95	1921	Sandy Black	RAL9004
12070010900015	5715174161376	Axis AX-S3 17w CRI90 17°	4000K	95	1921	Sandy white	RAL9016
12070011800016	5715174161406	Axis AX-S3 17w CRI90 24°	4000K	95	1921	Sandy Black	RAL9004
12070010900016	5715174161413	Axis AX-S3 17w CRI90 24°	4000K	95	1921	Sandy white	RAL9016
12070011800017	5715174161444	Axis AX-S3 17w CRI90 36°	4000K	95	1921	Sandy Black	RAL9004
12070010900017	5715174161451	Axis AX-S3 17w CRI90 36°	4000K	95	1921	Sandy white	RAL9016

Specification – 5000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070011800023	5715174161482	Axis AX-S3 17w CRI90 17°	5000K	99	1999	Sandy Black	RAL9004
12070010900023	5715174161499	Axis AX-S3 17w CRI90 17°	5000K	99	1999	Sandy white	RAL9016
12070011800024	5715174161529	Axis AX-S3 17w CRI90 24°	5000K	99	1999	Sandy Black	RAL9004
12070010900024	5715174161536	Axis AX-S3 17w CRI90 24°	5000K	99	1999	Sandy white	RAL9016
12070011800025	5715174161567	Axis AX-S3 17w CRI90 36°	5000K	99	1999	Sandy Black	RAL9004
12070010900025	5715174161574	Axis AX-S3 17w CRI90 36°	5000K	99	1999	Sandy white	RAL9016