

SIGNIFICANT LIGHTING | ICONIC PROJECTS | BETTER BUSINESS

When your projects get ambitious don't think ordinary

The lighting we provide means you can present installations that deliver experiences your customers – and their users – haven't seen before. Whether subtle or in your face, this enables you to set new standards for visual impact, end-user satisfaction and low cost of ownership throughout high-profile spaces.

HERE&AFTER

info@hereandafter.com

hereandafter.com



Axis spot data sheet

Axis spot is a futuristic and minimalistic adjustable spotlight – Through the unique adaptor, filled with innovative technology – well tucked away inside the track, Axis spot stand out both in design and functionality. With a wide range of accessory, Axis offer a wide range of applications option - only the imagination is the limit.

The Axis spot structure is based on aluminium and thermoplastic. The aluminium gives the spotlight an exceptionally good passive dissipation, which provide an exceedingly long lifespan. In the thermoplastic adaptor, there is a High frequency Dali driver, with low in-rush current. The swivel joints allow the spot to rotate 355° and tilted to both sides. With a high efficiency reflector or zoom, which is position deep in the spot, the Axis spot provide an elevated level of visual comfort and low glare.

DESIGNED BY ERIK PADKJÆR LARSEN

LED



IP20

650°

A*

5 YEARS WARRANTY

Other colours on request

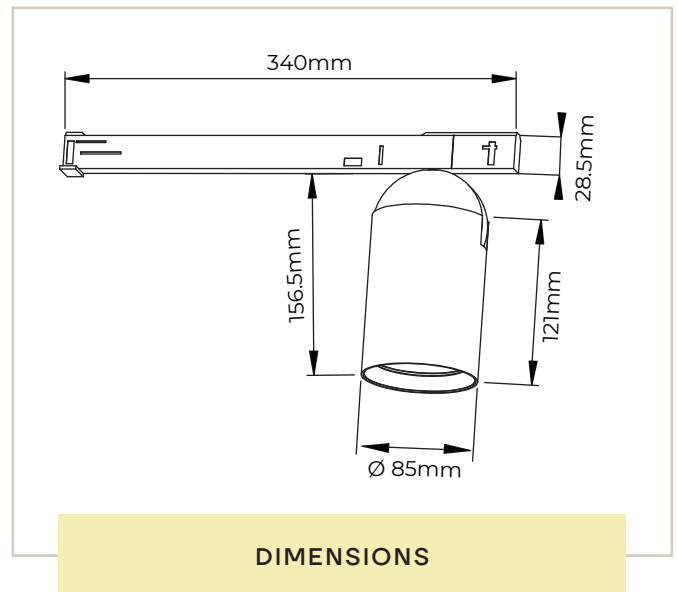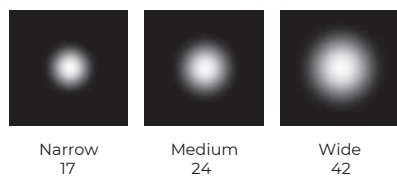

Light Technical Information

W source	24	Lamp Type	COB	Ripple (%)	<5
W system	28	Voltage (V)	31-37	Ballast losses (W)	/
lm source	2963/ 3093/ 3248/ 3398	LED Current (mA)	700	Control	DALI
lm system	2519/2629/ 2761/2888	MacAdam Step	3	UGR	≤19
Lm/W	92/ 96/100/105	LED numbers	1	GWT (C)	650
Lm in emergency mode	/	Tc (Ta25 C)	75	Rotation angle (°)	355
CCT	2700/ 3000/ 4000/ 5000	Life span LED	50000H L70B50	Tilting angle (°)	70
CRI	90	Power factor	PF>0.9	Cutout (mm)	/
Lamp code	CXM-14-30-90-36-TC40	Minimum dimming (%)	0-100	Looping	/

Specification – 2700K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070041800001	5715174161604	Axis AX-S4 24w CRI90 17°	2700K	92	2519	Sandy Black	RAL9004
12070040900001	5715174161611	Axis AX-S4 24w CRI90 17°	2700K	92	2519	Sandy white	RAL9016
12070041800002	5715174161642	Axis AX-S4 24w CRI90 24°	2700K	92	2519	Sandy Black	RAL9004
12070040900002	5715174161659	Axis AX-S4 24w CRI90 24°	2700K	92	2519	Sandy white	RAL9016
12070041800003	5715174161680	Axis AX-S4 24w CRI90 42°	2700K	92	2519	Sandy Black	RAL9004
12070040900003	5715174161697	Axis AX-S4 24w CRI90 42°	2700K	92	2519	Sandy white	RAL9016

Specification – 3000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070041800007	5715174161765	Axis AX-S4 24w CRI90 17°	3000K	96	2629	Sandy Black	RAL9004
12070040900007	5715174161772	Axis AX-S4 24w CRI90 17°	3000K	96	2629	Sandy white	RAL9016
12070041800008	5715174161802	Axis AX-S4 24w CRI90 24°	3000K	96	2629	Sandy Black	RAL9004
12070040900008	5715174161819	Axis AX-S4 24w CRI90 24°	3000K	96	2629	Sandy white	RAL9016
12070041800009	5715174161840	Axis AX-S4 24w CRI90 42°	3000K	96	2629	Sandy Black	RAL9004
12070040900009	5715174161857	Axis AX-S4 24w CRI90 42°	3000K	96	2629	Sandy white	RAL9016

Specification – 4000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070041800013	5715174161925	Axis AX-S4 24w CRI90 17°	4000K	100	2761	Sandy Black	RAL9004
12070040900013	5715174161932	Axis AX-S4 24w CRI90 17°	4000K	100	2761	Sandy white	RAL9016
12070041800014	5715174161963	Axis AX-S4 24w CRI90 24°	4000K	100	2761	Sandy Black	RAL9004
12070040900014	5715174161970	Axis AX-S4 24w CRI90 24°	4000K	100	2761	Sandy white	RAL9016
12070041800015	5715174162007	Axis AX-S4 24w CRI90 42°	4000K	100	2761	Sandy Black	RAL9004
12070040900015	5715174162014	Axis AX-S4 24w CRI90 42°	4000K	100	2761	Sandy white	RAL9016

Specification – 5000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
12070041800019	5715174162083	Axis AX-S4 24w CRI90 17°	5000K	105	2888	Sandy Black	RAL9004
12070040900019	5715174162090	Axis AX-S4 24w CRI90 17°	5000K	105	2888	Sandy white	RAL9016
12070041800020	5715174162120	Axis AX-S4 24w CRI90 24°	5000K	105	2888	Sandy Black	RAL9004
12070040900020	5715174162137	Axis AX-S4 24w CRI90 24°	5000K	105	2888	Sandy white	RAL9016
12070041800021	5715174162168	Axis AX-S4 24w CRI90 42°	5000K	105	2888	Sandy Black	RAL9004
12070040900021	5715174162175	Axis AX-S4 24w CRI90 42°	5000K	105	2888	Sandy white	RAL9016