

SIGNIFICANT LIGHTING | ICONIC PROJECTS | BETTER BUSINESS

When your projects get ambitious don't think ordinary

The lighting we provide means you can present installations that deliver experiences your customers – and their users – haven't seen before. Whether subtle or in your face, this enables you to set new standards for visual impact, end-user satisfaction and low cost of ownership throughout high-profile spaces.

HERE&AFTER

info@hereandafter.com

hereandafter.com



PRODUCT DATASHEET

HOVER Tilt Pendant 127mm

HO-PT2

Hover PT data sheet

Hover PT is part of a pendant series, which varies in sizes and functionality. With its unique shape, tilt and rotation function, Hover PT offers a Nordic style ideal for numerous scene settings, such as, dining areas, conference rooms, zenithally accent lighting and much more. The tilting and rotating function provide a wide range of options to adjust and direct the light.

The Hover PT is produced of aluminium and. The aluminium gives the luminaire a particularly good passive dissipation, which provides an exceptionally long lifespan. With high efficiency reflectors, which are positioned deep in the luminaire, the Hover PT provides a high level of visual comfort and low glare. With a Triac driver and easy cable adjustment system, integrated in the canopy, allows the cable to be fitted easily to match the required position. The fabric power cable which matches the same colour as the external finish of the pendant, gives the pendant its final touch.


DESIGNED BY ERIK PADKJÆR LARSEN

LED IP20 650°


5 YEARS WARRANTY



Other colours on request



Narrow 15 Medium 25 Wide 36

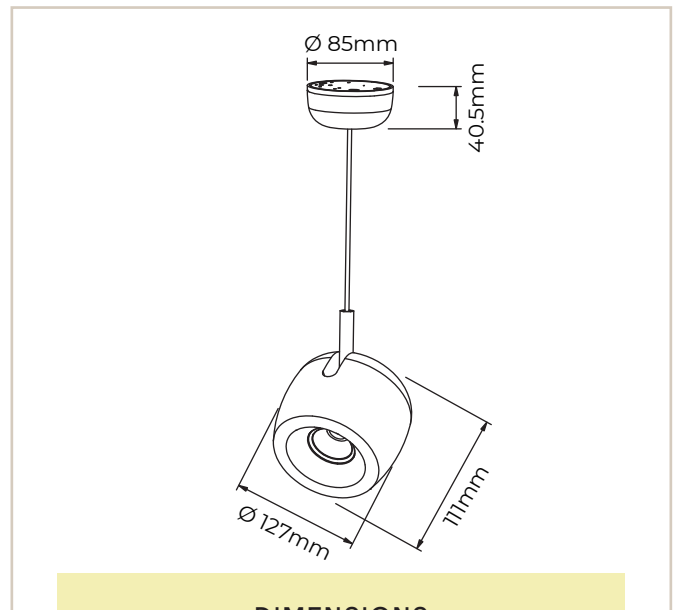

DIMENSIONS

Light Technical Information

W source	9	Lamp Type	COB	Ripple (%)	<5
W system	11	Voltage (V)	34-38	Over voltage protection	/
Im source	981/ 1059/ 1137	LED Current (mA)	250	Ballast losses (W)	/
Im system	869/ 938/ 1007	MacAdam Step	3	Control	Triac
Lm/W	83/ 89/ 96	LED numbers	1	UGR	-3.5
Lm in emergency mode	/	Tc (Ta25 °C)	75	GWT (°C)	650
CCT	2700/ 3000/ 4000	Life span LED	50000H L70B50	Rotation angle (°)	355
CRI	95	Power factor	PF>0.9	Tilting angle (°)	90
Lamp code	CXM-6-30-90-36-TC40	Minimum dimming (%)	1	Cutout (mm)	/
Looping	/	/	/	/	/

Specification – 2700K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
13010211800002	5715174070395	Hover HO-PT2 9w CRI95 15°	2700K	83	869	Black Sandy	RAL9004
13010210900002	5715174070401	Hover HO-PT2 9w CRI95 15°	2700K	83	869	White Sandy	RAL9016
13010211800004	5715174070432	Hover HO-PT2 9w CRI95 25°	2700K	83	869	Black Sandy	RAL9004
13010210900004	5715174070449	Hover HO-PT2 9w CRI95 25°	2700K	83	869	White Sandy	RAL9016
13010211800006	5715174070470	Hover HO-PT2 9w CRI95 36°	2700K	83	869	Black Sandy	RAL9004
13010210900006	5715174070487	Hover HO-PT2 9w CRI95 36°	2700K	83	869	White Sandy	RAL9016

Specification – 3000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
13010211800008	5715174070517	Hover HO-PT2 9w CRI95 15°	3000K	89	938	Black Sandy	RAL9004
13010210900008	5715174070524	Hover HO-PT2 9w CRI95 15°	3000K	89	938	White Sandy	RAL9016
13010211800010	5715174070555	Hover HO-PT2 9w CRI95 25°	3000K	89	938	Black Sandy	RAL9004
13010210900010	5715174070562	Hover HO-PT2 9w CRI95 25°	3000K	89	938	White Sandy	RAL9016
13010211800012	5715174070593	Hover HO-PT2 9w CRI95 36°	3000K	89	938	Black Sandy	RAL9004
13010210900012	5715174070609	Hover HO-PT2 9w CRI95 36°	3000K	89	938	White Sandy	RAL9016

Specification – 4000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
13010211800014	5715174070630	Hover HO-PT2 9w CRI95 15°	4000K	96	1007	Black Sandy	RAL9004
13010210900014	5715174070647	Hover HO-PT2 9w CRI95 15°	4000K	96	1007	White Sandy	RAL9016
13010211800016	5715174070678	Hover HO-PT2 9w CRI95 25°	4000K	96	1007	Black Sandy	RAL9004
13010210900016	5715174070685	Hover HO-PT2 9w CRI95 25°	4000K	96	1007	White Sandy	RAL9016
13010211800018	5715174070715	Hover HO-PT2 9w CRI95 36°	4000K	96	1007	Black Sandy	RAL9004
13010210900018	5715174070722	Hover HO-PT2 9w CRI95 36°	4000K	96	1007	White Sandy	RAL9016