

SIGNIFICANT LIGHTING | ICONIC PROJECTS | BETTER BUSINESS

## When your projects get ambitious don't think ordinary

The lighting we provide means you can present installations that deliver experiences your customers – and their users – haven't seen before. Whether subtle or in your face, this enables you to set new standards for visual impact, end-user satisfaction and low cost of ownership throughout high-profile spaces.

**HERE&AFTER**

[info@hereandafter.com](mailto:info@hereandafter.com)

[hereandafter.com](http://hereandafter.com)



### Hover WD/WU data sheet

Hover WD and WU is part of a Wall lamp series, which varies in sizes and functionality. With its unique shape, different light settings, Down or up and down light, offer Hover WD and WU a Nordic style ideal for numerous scene settings, such as, Bedrooms, hallway, and outdoor lighting.

The Hover WD and WU is produced of aluminium. The solid structure and the aluminium give the luminaire a strong passive dissipation, which provides an exceptionally long lifespan. With a specially designed efficiency reflector, the Hover WD and WU provide a high level of visual comfort and low glare. With an easy and well-hidden installation function, Hover WD and WU provide a clean finish.




### DESIGNED BY ERIK PADKJÆR LARSEN

LED
IP44
650°
A+

5 YEARS WARRANTY



Other colours on request

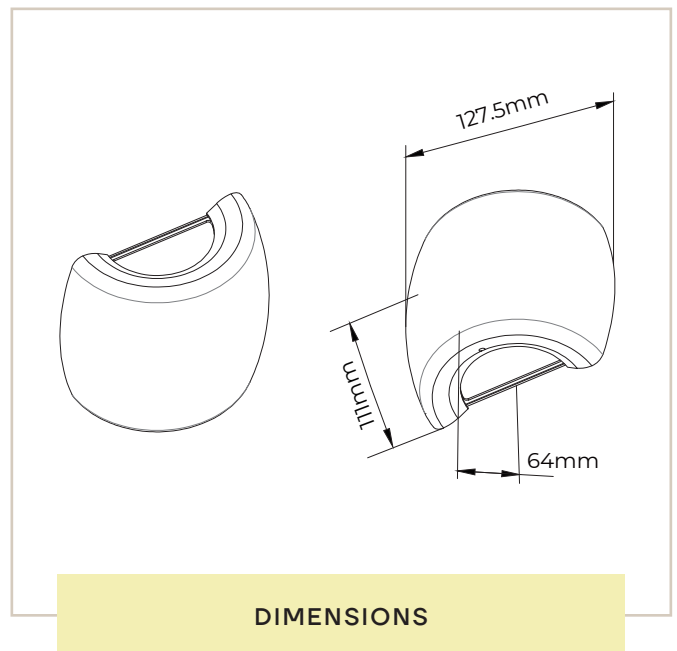

DIMENSIONS

### Light Technical Information

<b>W source</b>	2x6	<b>Lamp Type</b>	COB	<b>Ripple (%)</b>	±5
<b>W system</b>	2x7	<b>Voltage (V)</b>	31-37	<b>Over voltage protection</b>	/
<b>Im source</b>	2x623/ 2x669/ 2x725/ 2x705	<b>LED Current (mA)</b>	350	<b>Ballast losses (W)</b>	/
<b>Im system</b>	2x507/ 2x545/ 2x590/ 2x574	<b>MacAdam Step</b>	3	<b>Control</b>	Phase Dimmable
<b>Lm/W</b>	2x36/ 2x39/ 2x42/ 2x41	<b>LED numbers</b>	2	<b>UGR</b>	2x27
<b>Lm in emergency mode</b>	/	<b>Tc (Ta25 °C)</b>	65	<b>GWT (°C)</b>	650
<b>CCT</b>	2700/ 3000/ 4000/ 5000	<b>Life span LED</b>	50000H L70B50	<b>Rotation angle (°)</b>	/
<b>CRI</b>	95	<b>Power factor</b>	PF>0.9	<b>Tilting angle (°)</b>	/
<b>Lamp code</b>	CXM-6-30-95-36-TC40	<b>Minimum dimming (%)</b>	5	<b>Cutout (mm)</b>	/
<b>Looping</b>	/	/	/	/	/

## Specification – 2700K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
15010041800002	5715174072252	Hover HO-WU1 2x6w CRI95	2700K	2 x 36	2 x 507	Black Sandy	RAL9004
15010040900002	5715174072269	Hover HO-WU1 2x6w CRI95	2700K	2 x 36	2 x 507	White Sandy	RAL9016

## Specification – 3000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
15010041800004	5715174072276	Hover HO-WU1 2x6w CRI95	3000K	2 x 39	2 x 545	Black Sandy	RAL9004
15010040900004	5715174072283	Hover HO-WU1 2x6w CRI95	3000K	2 x 39	2 x 545	White Sandy	RAL9016

## Specification – 4000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
15010041800006	5715174072290	Hover HO-WU1 2x6w CRI95	4000K	2 x 42	2 x 590	Black Sandy	RAL9004
15010040900006	5715174072306	Hover HO-WU1 2x6w CRI95	4000K	2 x 42	2 x 590	White Sandy	RAL9016

## Specification – 5000K

Art number	EAN number	Text	CCT	Lm/W	Lm system	Colour	RAL
15010041800008	5715174072313	Hover HO-WU1 2x6w CRI95	5000K	2 x 41	2 x 574	Black Sandy	RAL9004
15010040900008	5715174072320	Hover HO-WU1 2x6w CRI95	5000K	2 x 41	2 x 574	White Sandy	RAL9016