

here&after

SIGNIFICANT LIGHTING | ICONIC PROJECTS | BETTER BUSINESS

When your projects get ambitious don't think ordinary

The lighting provided means installations that deliver experiences you haven't seen before. Whether subtle or in your face, this enables you to set new standards for visual impact, end-user satisfaction and low cost of ownership throughout high-profile spaces.


HERE&AFTER

info@hereandafter.com

hereandafter.com

PRODUCT CATALOGUE

MINI HYBRID

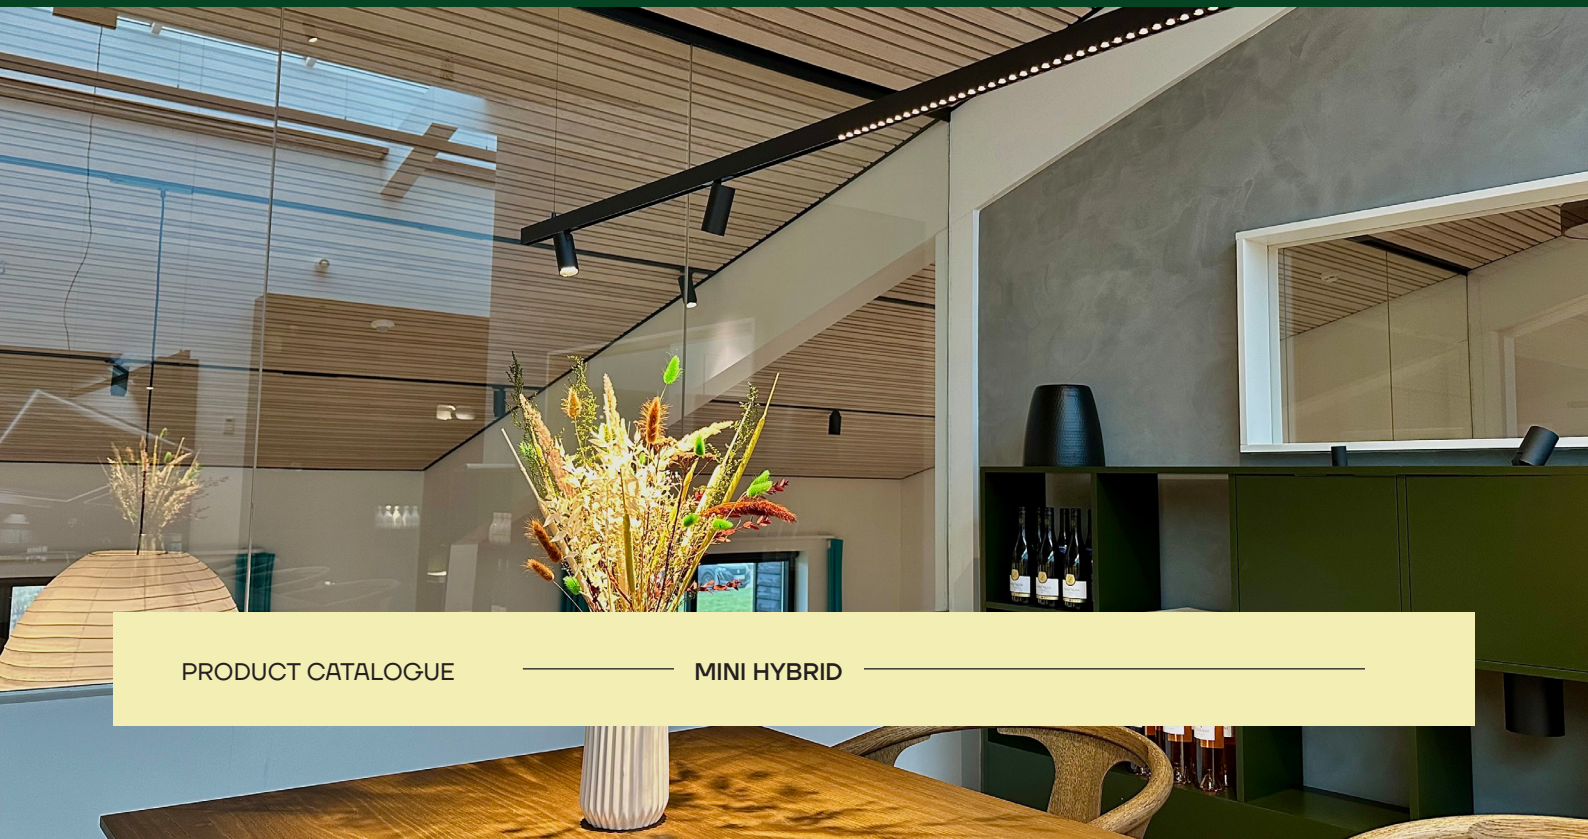



MINI HYBRID

COMPACT. FLEXIBLE. POWERFUL.

The Mini Hybrid series is a streamlined lighting solution that delivers big impact in a small form. Built for the electronic age, it seamlessly integrates lighting and control innovations to maximize both performance and versatility.

Designed for easy installation and adaptability, Mini Hybrid offers multiple mounting options and a range of accessories to fit any lighting setup. Whether you need general illumination, downlighting, or accent lighting, Mini Hybrid gives you the flexibility to create the perfect atmosphere.

Each Mini Hybrid fixture is engineered for effortless installation with no tools required, making it ideal for both quick updates and complex layouts. Its smart, compact design ensures high-performance lighting with minimal visual intrusion.

Efficient. Adaptable. Intuitive. Mini Hybrid brings lighting to the next level.

Mini Hybrid

Mini Hybrid Track Spot 1W

The Mini Hybrid series is designed for the electronic age. It paves the way for a flow of integrated lighting and control innovations, so you get the most out of each fixture and system.

LED

IP20

5 YEARS WARRANTY


650°

CE

CB




Other colors on request



Narrow
18

Wide
36

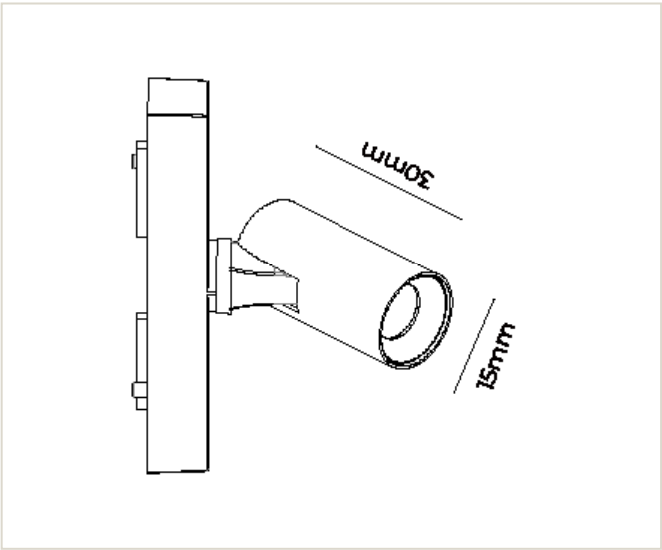

DIMENSIONS

Light Technical Information

W source	1	LED Current (mA)	350	Control	Triac
W system	1.3	MacAdam Step	5	LED numbers	1
lm/W	39/53/62	Life span LED	L90/B50 30000	Rotation angle (°)	350
lm system	51/69/80	Minimum dimming (%)	1	Tilting angle (°)	90
lm source	101/108/123	Flicker (%)	SVM < 0.4	Net weight (g)	16
CCT	2700/3000/4000	UGR	<19		
CRI	95	Optic	Lens		
Voltage (V)	DC24	Lamp Type	SMD SST-20		

Specification – 2700K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174005007	Mini Hybrid Track Spot 1W Black 9527 18°	95	18°	2700K	Triac	39	51	Black Sandy	RAL9004
5715174005038	Mini Hybrid Track Spot 1W White 9527 18°	95	18°	2700K	Triac	39	51	White Sandy	RAL9016
5715174005021	Mini Hybrid Track Spot 1W Black 9527 36°	95	36°	2700K	Triac	50	65	Black Sandy	RAL9004
5715174005052	Mini Hybrid Track Spot 1W White 9527 36°	95	36°	2700K	Triac	50	65	White Sandy	RAL9016

Specification – 3000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174005069	Mini Hybrid Track Spot 1W Black 9530 18°	95	18°	3000K	Triac	42	55	Black Sandy	RAL9004
5715174005090	Mini Hybrid Track Spot 1W White 9530 18°	95	18°	3000K	Triac	42	55	White Sandy	RAL9016
5715174005083	Mini Hybrid Track Spot 1W Black 9530 36°	95	36°	3000K	Triac	53	69	Black Sandy	RAL9004
5715174005113	Mini Hybrid Track Spot 1W White 9530 36°	95	36°	3000K	Triac	53	69	White Sandy	RAL9016

Specification – 4000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174005120	Mini Hybrid Track Spot 1W Black 9540 18°	95	18°	4000K	Triac	48	63	Black Sandy	RAL9004
5715174005151	Mini Hybrid Track Spot 1W White 9540 18°	95	18°	4000K	Triac	48	63	White Sandy	RAL9016
5715174005144	Mini Hybrid Track Spot 1W Black 9540 36°	95	36°	4000K	Triac	62	80	Black Sandy	RAL9004
5715174005175	Mini Hybrid Track Spot 1W White 9540 36°	95	36°	4000K	Triac	62	80	White Sandy	RAL9016

Mini Hybrid Track Spot 3W

The Mini Hybrid series is designed for the electronic age. It paves the way for a flow of integrated lighting and control innovations, so you get the most out of each fixture and system.

LED

IP20

5 YEARS WARRANTY


650°

CE

CB




Other colors on request



Narrow
18

Wide
36

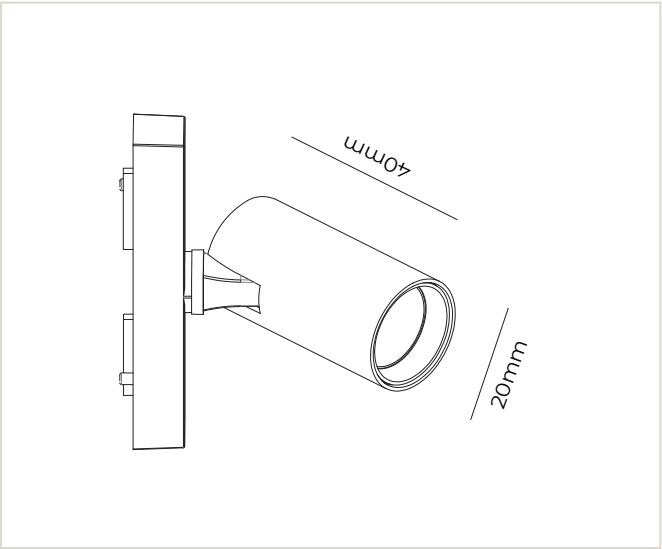

DIMENSIONS

Light Technical Information

W source	3	LED Current (mA)	180	Control	Triac
W system	3.4	MacAdam Step	3	LED numbers	1
lm/W	69/73/76	Life span LED	L90/B50 40000	Rotation angle (°)	350
lm system	233/247/260	Minimum dimming (%)	1	Tilting angle (°)	90
lm source	306/323/339	Flicker (%)	SVM < 0.4	Net weight (g)	23
CCT	2700/3000/4000	UGR	<10		
CRI	90	Optic	Reflector		
Voltage (V)	DC24	Lamp Type	COB CXM-3		

Specification – 2700K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174005304	Mini Hybrid Track Spot 3W Black 927 18°	90	18°	2700K	Triac	69	233	Black Sandy	RAL9004
5715174005328	Mini Hybrid Track Spot 3W White 927 18°	90	18°	2700K	Triac	69	233	White Sandy	RAL9016
5715174005380	Mini Hybrid Track Spot 3W Black 927 36°	90	36°	2700K	Triac	69	234	Black Sandy	RAL9004
5715174005403	Mini Hybrid Track Spot 3W White 927 36°	90	36°	2700K	Triac	69	234	White Sandy	RAL9016

Specification – 3000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174005427	Mini Hybrid Track Spot 3W Black 930 18°	90	18°	3000K	Triac	73	247	Black Sandy	RAL9004
5715174005441	Mini Hybrid Track Spot 3W White 930 18°	90	18°	3000K	Triac	73	247	White Sandy	RAL9016
5715174005502	Mini Hybrid Track Spot 3W Black 930 36°	90	36°	3000K	Triac	73	247	Black Sandy	RAL9004
5715174005526	Mini Hybrid Track Spot 3W White 930 36°	90	36°	3000K	Triac	73	247	White Sandy	RAL9016

Specification – 4000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174005540	Mini Hybrid Track Spot 3W Black 940 18°	90	18°	4000K	Triac	76	260	Black Sandy	RAL9004
5715174005564	Mini Hybrid Track Spot 3W White 940 18°	90	18°	4000K	Triac	76	260	White Sandy	RAL9016
5715174005625	Mini Hybrid Track Spot 3W Black 940 36°	90	36°	4000K	Triac	76	260	Black Sandy	RAL9004
5715174005649	Mini Hybrid Track Spot 3W White 940 36°	90	36°	4000K	Triac	76	260	White Sandy	RAL9016

Mini Hybrid Track Spot 5W

The Mini Hybrid series is designed for the electronic age. It paves the way for a flow of integrated lighting and control innovations, so you get the most out of each fixture and system.

LED

IP20

5 YEARS WARRANTY


650°

CE

CB




Other colors on request



Narrow
18

Wide
36

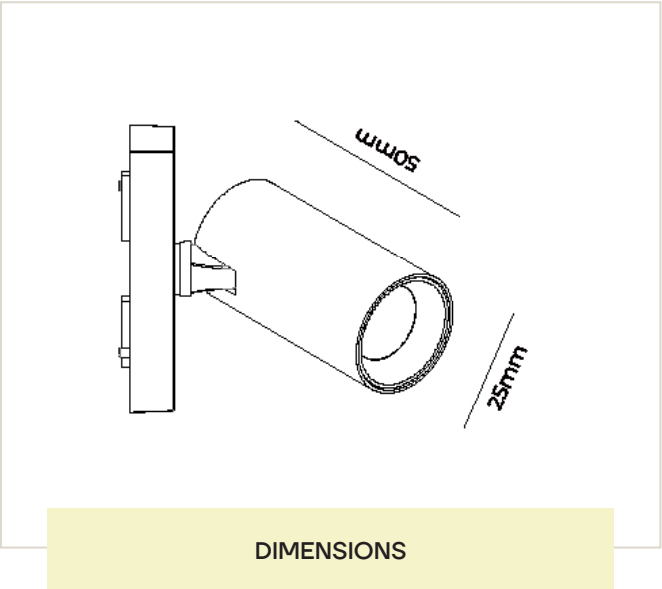

DIMENSIONS

Specification – 2700K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174005786	Mini Hybrid Track Spot 5W Black 927 18°	90	18°	2700K	Triac	51	280	Black Sandy	RAL9004
5715174005809	Mini Hybrid Track Spot 5W White 927 18°	90	18°	2700K	Triac	51	280	White Sandy	RAL9016
5715174005861	Mini Hybrid Track Spot 5W Black 927 36°	90	36°	2700K	Triac	62	339	Black Sandy	RAL9004
5715174005885	Mini Hybrid Track Spot 5W White 927 36°	90	36°	2700K	Triac	62	339	White Sandy	RAL9016

Specification – 3000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174005908	Mini Hybrid Track Spot 5W Black 930 18°	90	18°	3000K	Triac	54	295	Black Sandy	RAL9004
5715174005922	Mini Hybrid Track Spot 5W White 930 18°	90	18°	3000K	Triac	54	295	White Sandy	RAL9016
5715174005984	Mini Hybrid Track Spot 5W Black 930 36°	90	36°	3000K	Triac	65	358	Black Sandy	RAL9004
5715174006004	Mini Hybrid Track Spot 5W White 930 36°	90	36°	3000K	Triac	65	358	White Sandy	RAL9016

Specification – 4000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174006028	Mini Hybrid Track Spot 5W Black 940 18°	90	18°	4000K	Triac	57	311	Black Sandy	RAL9004
5715174006042	Mini Hybrid Track Spot 5W White 940 18°	90	18°	4000K	Triac	57	311	White Sandy	RAL9016
5715174006103	Mini Hybrid Track Spot 5W Black 940 36°	90	36°	4000K	Triac	69	377	Black Sandy	RAL9004
5715174006127	Mini Hybrid Track Spot 5W White 940 36°	90	36°	4000K	Triac	69	377	White Sandy	RAL9016

Light Technical Information

W source	5	LED Current (mA)	280	Control	Triac
W system	5.5	MacAdam Step	3	LED numbers	1
lm/W	51/54/59	Life span LED	L90/B50 40000	Rotation angle (°)	350
lm system	280/295/377	Minimum dimming (%)	1	Tilting angle (°)	90
lm source	440/464/488	Flicker (%)	SVM < 0.4	Net weight (g)	36
CCT	2700/3000/4000	UGR	<10		
CRI	90	Optic	Reflector		
Voltage (V)	DC24	Lamp Type	COB CXM-3		

Mini Hybrid Track Spot 7W

The Mini Hybrid series is designed for the electronic age. It paves the way for a flow of integrated lighting and control innovations, so you get the most out of each fixture and system.

LED

IP20

5 YEARS WARRANTY



650°

CE

CB



Other colors on request

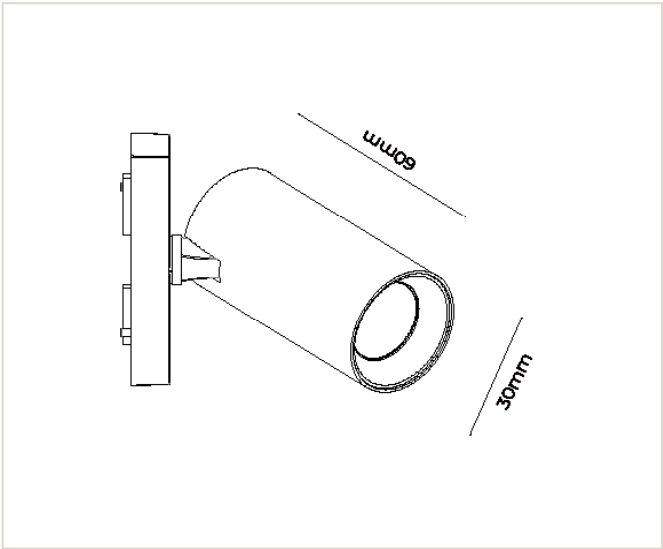

DIMENSIONS

Light Technical Information

W source	7	LED Current (mA)	350	Control	Triac
W system	6.8	MacAdam Step	3	LED numbers	1
lm/W	84/90/95	Life span LED	L90/B50 40000	Rotation angle (°)	350
lm system	574/609/643	Minimum dimming (%)	1	Tilting angle (°)	90
lm source	669/701/740	Flicker (%)	SVM < 0.4	Net weight (g)	55
CCT	2700/3000/4000	UGR	<19		
CRI	90	Optic	Reflector		
Voltage (V)	DC24	Lamp Type	COB CXM-4		

Specification – 2700K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174006264	Mini Hybrid Track Spot 7W Black 927 18°	90	18°	2700K	Triac	84	574	Black Sandy	RAL9004
5715174006288	Mini Hybrid Track Spot 7W White 927 18°	90	18°	2700K	Triac	84	574	White Sandy	RAL9016
5715174006301	Mini Hybrid Track Spot 7W Black 927 36°	90	36°	2700K	Triac	85	581	Black Sandy	RAL9004
5715174006325	Mini Hybrid Track Spot 7W White 927 36°	90	36°	2700K	Triac	85	581	White Sandy	RAL9016

Specification – 3000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174006349	Mini Hybrid Track Spot 7W Black 930 18°	90	18°	3000K	Triac	88	601	Black Sandy	RAL9004
5715174006363	Mini Hybrid Track Spot 7W White 930 18°	90	18°	3000K	Triac	88	601	White Sandy	RAL9016
5715174006387	Mini Hybrid Track Spot 7W Black 930 36°	90	36°	3000K	Triac	90	609	Black Sandy	RAL9004
5715174006400	Mini Hybrid Track Spot 7W White 930 36°	90	36°	3000K	Triac	90	609	White Sandy	RAL9016

Specification – 4000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174006424	Mini Hybrid Track Spot 7W Black 940 18°	90	18°	4000K	Triac	93	634	Black Sandy	RAL9004
5715174006448	Mini Hybrid Track Spot 7W White 940 18°	90	18°	4000K	Triac	93	634	White Sandy	RAL9016
5715174006462	Mini Hybrid Track Spot 7W Black 940 36°	90	36°	4000K	Triac	95	643	Black Sandy	RAL9004
5715174006486	Mini Hybrid Track Spot 7W White 940 36°	90	36°	4000K	Triac	95	643	White Sandy	RAL9016



Mini Hybrid Brick 2W 100mm

The Mini Hybrid series is designed for the electronic age. It paves the way for a flow of integrated lighting and control innovations, so you get the most out of each fixture and system.


LED

IP20


650°

5 YEARS WARRANTY


CB



Other colors on request



100

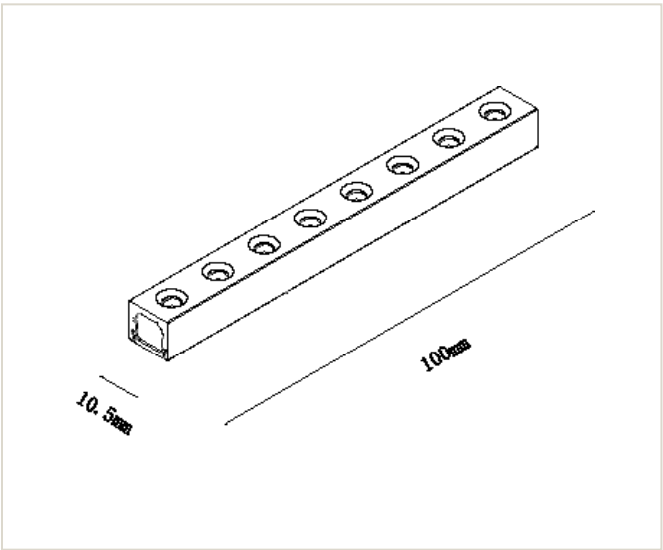

DIMENSIONS

Light Technical Information

W source	2	LED Current (mA)	/	Control	Triac
W system	1.7	MacAdam Step	5	LED numbers	1
lm/W	77/82/88	Life span LED	L90/B50 40000	Rotation angle (°)	/
lm system	131/139/149	Minimum dimming (%)	1	Tilting angle (°)	/
lm source	185/195/210	Flicker (%)	SVM < 0.4	Net weight (g)	17
CCT	2700/3000/4000	UGR	<22		
CRI	90	Optic	/		
Voltage (V)	DC24	Lamp Type	SMD MP3030		

Specification – 2700K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007063	Mini Hybrid Brick 2W Black 927 100° 100mm	90	100°	2700K	Triac	77	131	Matt Black	RAL9004
5715174007087	Mini Hybrid Brick 2W White 927 100° 100mm	90	100°	2700K	Triac	77	131	Matt White	RAL9016

Specification – 3000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007100	Mini Hybrid Brick 2W Black 930 100° 100mm	90	100°	3000K	Triac	82	139	Matt Black	RAL9004
5715174007124	Mini Hybrid Brick 2W White 930 100° 100mm	90	100°	3000K	Triac	82	139	Matt White	RAL9016

Specification – 4000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007148	Mini Hybrid Brick 2W Black 940 100° 100mm	90	100°	4000K	Triac	88	149	Matt Black	RAL9004
5715174007162	Mini Hybrid Brick 2W White 940 100° 100mm	90	100°	4000K	Triac	88	149	Matt White	RAL9016

Mini Hybrid Brick 6W 300mm

The Mini Hybrid series is designed for the electronic age. It paves the way for a flow of integrated lighting and control innovations, so you get the most out of each fixture and system.

LED

IP20


650°

5 YEARS WARRANTY


CB



Other colors on request



100

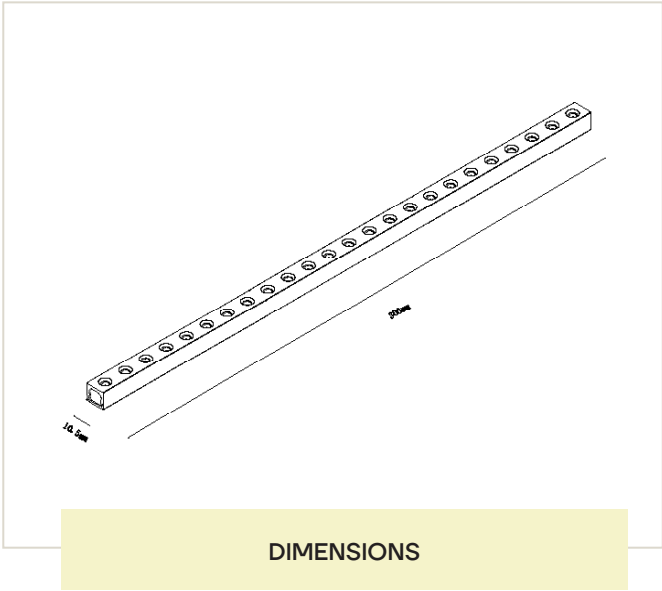

Light Technical Information

W source	6	LED Current (mA)	/	Control	Triac
W system	4.2	MacAdam Step	5	LED numbers	1
lm/W	71/75/80	Life span LED	L90/B50 40000	Rotation angle (°)	/
lm system	298/315/337	Minimum dimming (%)	1	Tilting angle (°)	/
lm source	420/445/475	Flicker (%)	SVM < 0.4	Net weight (g)	51
CCT	2700/3000/4000	UGR	<22		
CRI	90	Optic	/		
Voltage (V)	DC24	Lamp Type	SMD MP3030		

Specification – 2700K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007223	Mini Hybrid Brick 6W Black 927 100° 300mm	90	100°	2700K	Triac	71	298	Matt Black	RAL9004
5715174007247	Mini Hybrid Brick 6W White 927 100° 300mm	90	100°	2700K	Triac	71	298	Matt White	RAL9016

Specification – 3000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007261	Mini Hybrid Brick 6W Black 930 100° 300mm	90	100°	3000K	Triac	75	315	Matt Black	RAL9004
5715174007285	Mini Hybrid Brick 6W White 930 100° 300mm	90	100°	3000K	Triac	75	315	Matt White	RAL9016

Specification – 4000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007308	Mini Hybrid Brick 6W Black 940 100° 300mm	90	100°	4000K	Triac	80	337	Matt Black	RAL9004
5715174007322	Mini Hybrid Brick 6W White 940 100° 300mm	90	100°	4000K	Triac	80	337	Matt White	RAL9016

Mini Hybrid Brick 12W 600mm

The Mini Hybrid series is designed for the electronic age. It paves the way for a flow of integrated lighting and control innovations, so you get the most out of each fixture and system.

LED

IP20


650°

5 YEARS WARRANTY


CB



Other colors on request



100

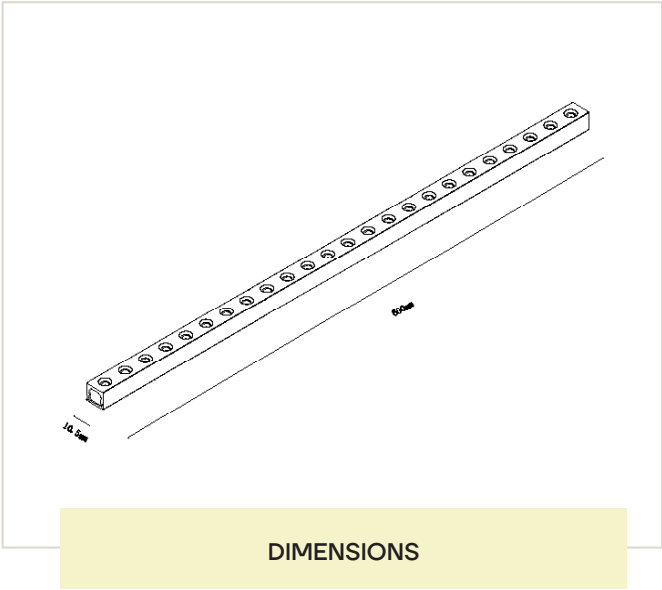

Light Technical Information

W source	12	LED Current (mA)	/	Control	Triac
W system	12.2	MacAdam Step	5	LED numbers	1
lm/W	50/52/52	Life span LED	L90/B50 40000	Rotation angle (°)	/
lm system	605/638/631	Minimum dimming (%)	1	Tilting angle (°)	/
lm source	848/899/890	Flicker (%)	SVM < 0.4	Net weight (g)	102
CCT	2700/3000/4000	UGR	<22		
CRI	90	Optic	/		
Voltage (V)	DC24	Lamp Type	SMD MP3030		

Specification – 2700K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007384	Mini Hybrid Brick 12W Black 927 100° 600mm	90	100°	2700K	Triac	50	605	Matt Black	RAL9004
5715174007407	Mini Hybrid Brick 12W White 927 100° 600mm	90	100°	2700K	Triac	50	605	Matt White	RAL9016

Specification – 3000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007421	Mini Hybrid Brick 12W Black 930 100° 600mm	90	100°	3000K	Triac	52	638	Matt Black	RAL9004
5715174007445	Mini Hybrid Brick 12W White 930 100° 600mm	90	100°	3000K	Triac	52	638	Matt White	RAL9016

Specification – 4000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007469	Mini Hybrid Brick 12W Black 940 100° 600mm	90	100°	4000K	Triac	52	631	Matt Black	RAL9004
5715174007483	Mini Hybrid Brick 12W White 940 100° 600mm	90	100°	4000K	Triac	52	631	Matt White	RAL9016



Mini Hybrid Linear 1W 100mm

The Mini Hybrid series is designed for the electronic age. It paves the way for a flow of integrated lighting and control innovations, so you get the most out of each fixture and system.

LED


IP20

650°


5 YEARS WARRANTY

CE


CB



Other colors on request



115

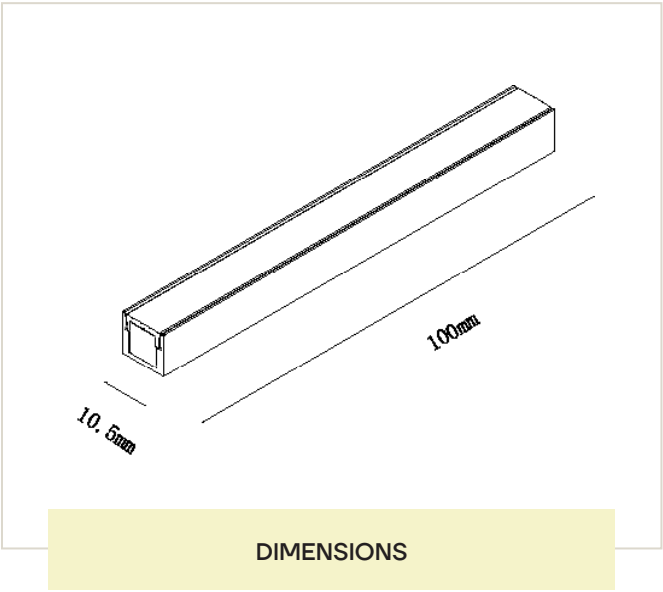

Light Technical Information

W source	1	LED Current (mA)	/	Control	Triac
W system	0.7	MacAdam Step	5	LED numbers	1
lm/W	27/30/33	Life span LED	L90/B50 30000	Rotation angle (°)	/
lm system	19/21/23	Minimum dimming (%)	1	Tilting angle (°)	/
lm source	48/52/57.5	Flicker (%)	SVM < 0.4	Net weight (g)	17
CCT	2700/3000/4000	UGR	<24		
CRI	90	Optic	/		
Voltage (V)	DC24	Lamp Type	COB Strip		

Specification – 2700K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007544	Mini Hybrid Linear 1W Black 927 115° 100mm	90	115°	2700K	Triac	27	19	Matt Black	RAL9004
5715174007568	Mini Hybrid Linear 1W White 927 115° 100mm	90	115°	2700K	Triac	27	19	Matt White	RAL9016

Specification – 3000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007582	Mini Hybrid Linear 1W Black 930 115° 100mm	90	115°	3000K	Triac	30	21	Matt Black	RAL9004
5715174007605	Mini Hybrid Linear 1W White 930 115° 100mm	90	115°	3000K	Triac	30	21	Matt White	RAL9016

Specification – 4000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007629	Mini Hybrid Linear 1W Black 940 115° 100mm	90	115°	4000K	Triac	33	23	Matt Black	RAL9004
5715174007643	Mini Hybrid Linear 1W White 940 115° 100mm	90	115°	4000K	Triac	33	23	Matt White	RAL9016

Mini Hybrid Linear 3W 300mm

The Mini Hybrid series is designed for the electronic age. It paves the way for a flow of integrated lighting and control innovations, so you get the most out of each fixture and system.

LED

IP20


650°

5 YEARS WARRANTY


CB



Other colors on request



115

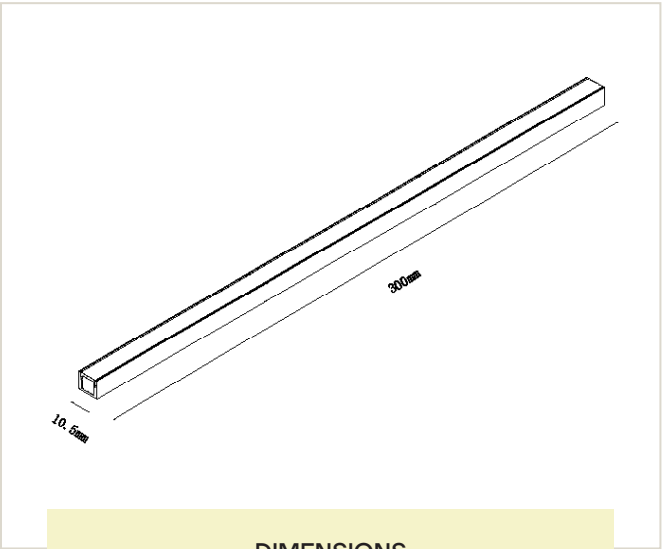

DIMENSIONS

Specification – 2700K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007704	Mini Hybrid Linear 3W Black 927 115° 300mm	90	115°	2700K	Triac	32	60	Matt Black	RAL9004
5715174007728	Mini Hybrid Linear 3W White 927 115° 300mm	90	115°	2700K	Triac	32	60	Matt White	RAL9016

Specification – 3000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007742	Mini Hybrid Linear 3W Black 930 115° 300mm	90	115°	3000K	Triac	34	65	Matt Black	RAL9004
5715174007766	Mini Hybrid Linear 3W White 930 115° 300mm	90	115°	3000K	Triac	34	65	Matt White	RAL9016

Specification – 4000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007780	Mini Hybrid Linear 3W Black 940 115° 300mm	90	115°	4000K	Triac	38	72	Matt Black	RAL9004
5715174007803	Mini Hybrid Linear 3W White 940 115° 300mm	90	115°	4000K	Triac	38	72	Matt White	RAL9016

Light Technical Information

W source	3	LED Current (mA)	/	Control	Triac
W system	1.9	MacAdam Step	5	LED numbers	1
lm/W	32/34/38	Life span LED	L90/B50 30000	Rotation angle (°)	/
lm system	60/65/72	Minimum dimming (%)	1	Tilting angle (°)	/
lm source	144/156/172.5	Flicker (%)	SVM < 0.4	Net weight (g)	51
CCT	2700/3000/4000	UGR	<24		
CRI	90	Optic	/		
Voltage (V)	DC24	Lamp Type	COB Strip		

Mini Hybrid Linear 6W 600mm

The Mini Hybrid series is designed for the electronic age. It paves the way for a flow of integrated lighting and control innovations, so you get the most out of each fixture and system.

LED

IP20


650°

5 YEARS WARRANTY


CB



Other colors on request



115

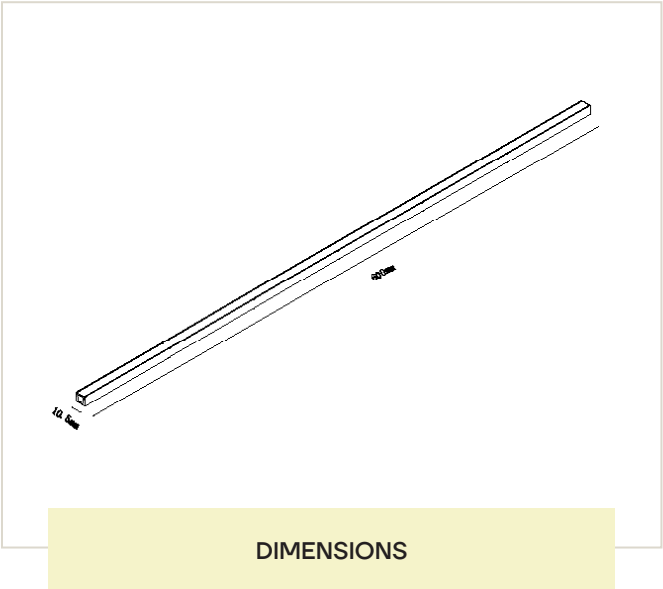

Light Technical Information

W source	6	LED Current (mA)	/	Control	Triac
W system	6.2	MacAdam Step	5	LED numbers	1
lm/W	19/18/22	Life span LED	L90/B50 30000	Rotation angle (°)	/
lm system	115/114/138	Minimum dimming (%)	1	Tilting angle (°)	/
lm source	275/298/329	Flicker (%)	SVM < 0.4	Net weight (g)	102
CCT	2700/3000/4000	UGR	<24		
CRI	90	Optic	/		
Voltage (V)	DC24	Lamp Type	COB Strip		

Specification – 2700K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007865	Mini Hybrid Linear 6W Black 927 115° 600mm	90	115°	2700K	Triac	19	115	Matt Black	RAL9004
5715174007889	Mini Hybrid Linear 6W White 927 115° 600mm	90	115°	2700K	Triac	19	115	Matt White	RAL9016

Specification – 3000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007902	Mini Hybrid Linear 6W Black 930 115° 600mm	90	115°	3000K	Triac	18	114	Matt Black	RAL9004
5715174007926	Mini Hybrid Linear 6W White 930 115° 600mm	90	115°	3000K	Triac	18	114	Matt White	RAL9016

Specification – 4000K

EAN number	Item Name	CRI	Optic	CCT	Control	Lm/W	Lm System	Color	RAL
5715174007940	Mini Hybrid Linear 6W Black 940 115° 600mm	90	115°	4000K	Triac	22	138	Matt Black	RAL9004
5715174007964	Mini Hybrid Linear 6W Black 940 115° 600mm	90	115°	4000K	Triac	22	138	Matt White	RAL9016





The Mini Hybrid Collection

Seamless Lighting for Any Space


Mini Hybrid is a compact and flexible LED lighting solution designed to adapt to a wide range of applications. Whether integrated into furniture systems, window displays, office environments, hotels, or retail spaces, Mini Hybrid delivers high-quality illumination with a sleek, modern design.

With tool-free installation and multiple mounting options, Mini Hybrid offers effortless adaptability for both new and existing setups. Its versatile design makes it ideal for accent lighting, task lighting, and ambient illumination, ensuring the perfect lighting experience in any setting.


From hospitality and workspace solutions to architectural and custom interiors, Mini Hybrid brings powerful lighting performance in a discreet and elegant form.

Mini Hybrid

Mini Hybrid 2.4M Square Track

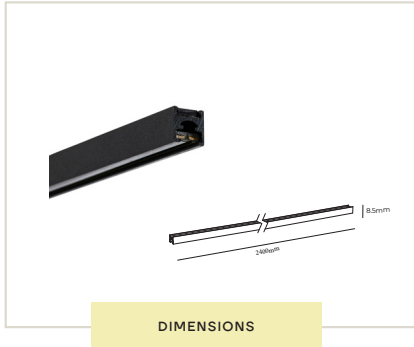


Mini Hybrid 2.4M Profile A

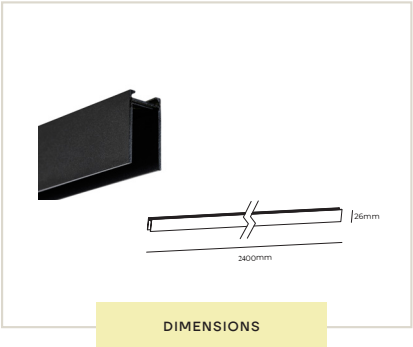


Mini Hybrid 2.4M Profile B




Mini Hybrid Cover for profile A

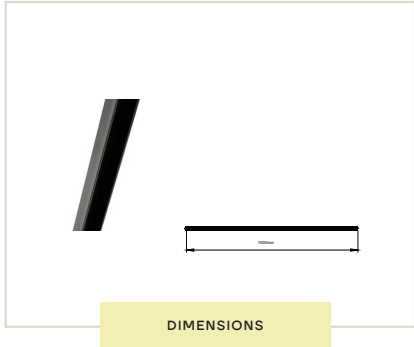

Mini Hybrid End Cap - Square Track

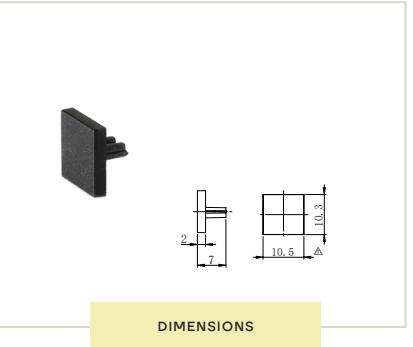


Mini Hybrid End Feeder

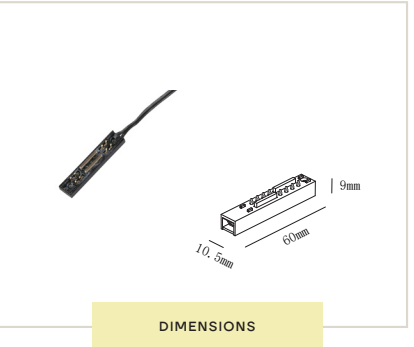


Mini Hybrid L Joint




Mini Hybrid I Joint

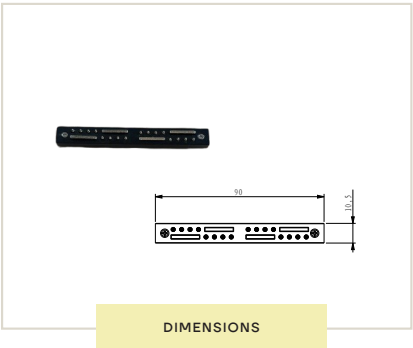


Mini Hybrid Straight Bracket

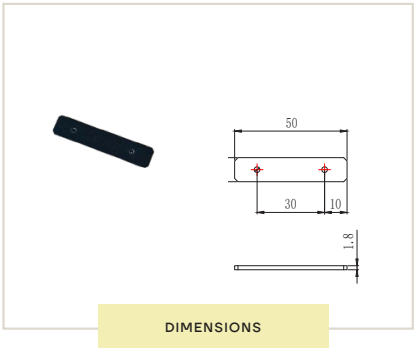

Mini Hybrid L Bracket

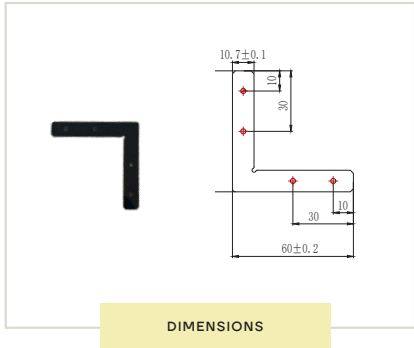

Mini Hybrid Wire suspension kit 4M

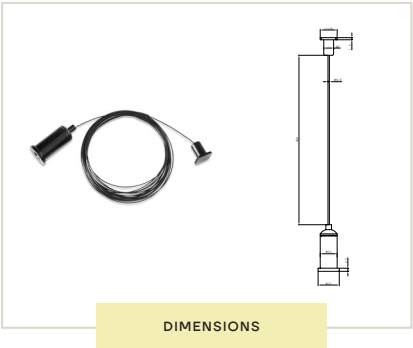

Item/EAN Number	Item Name	Color	RAL
5715174008114	Mini Hybrid 2.4M Square Track Black	Black Sandy	RAL9004
5715174008145	Mini Hybrid 2.4M Square Track White	White Sandy	RAL9016
5715174008046	Mini Hybrid 2.4M Profile A w/Track/End Caps/Clips Black	Black Sandy	RAL9004
5715174008053	Mini Hybrid 2.4M Profile A w/Track/End Caps/Clips White	White Sandy	RAL9016
5715174008244	Mini Hybrid Cover for profile A 1M Black	Black Sandy	RAL9004
5715174008107	Mini Hybrid Cover for Profile A 1M White	White Sandy	RAL9016
5715174008121	Mini Hybrid 2.4M Profile B w/Track/End Caps Black	Black Sandy	RAL9004
5715174008138	Mini Hybrid 2.4M Profile B w/Track/End Caps White	White Sandy	RAL9016
5715174151841	Mini Hybrid End Cap 2pcs - Square Track Black	Black Sandy	RAL9004
5715174151858	Mini Hybrid End Cap 2pcs - Square Track White	White Sandy	RAL9016
5715174151889	Mini Hybrid End Feeder Black	Black Sandy	RAL9004
5715174151896	Mini Hybrid End Feeder White	White Sandy	RAL9016
5715174151902	Mini Hybrid L Joint Black	Black Sandy	RAL9004
5715174151919	Mini Hybrid L Joint White	White Sandy	RAL9016
5715174008541	Mini Hybrid I Joint Black	Black Sandy	RAL9004
5715174008558	Mini Hybrid I Joint White	White Sandy	RAL9016
5715174008589	Mini Hybrid Straight Bracket Black	Black Sandy	RAL9004
5715174008572	Mini Hybrid Straight Bracket White	White Sandy	RAL9016
5715174008602	Mini Hybrid L Bracket Black	Black Sandy	RAL9004
5715174008596	Mini Hybrid L Bracket White	White Sandy	RAL9016
5715174008022	Mini Hybrid Wire suspension kit 4M Black	Black Sandy	RAL9004
5715174008039	Mini Hybrid Wire suspension kit4M White	White Sandy	RAL9016
5715174152015	Extend Cable 2.5M male/female	Black Sandy	RAL9004
5715174150059	25w Driver Constant voltage 24V Triac		
5715174150066	50w Driver Constant voltage 24V Triac		
5715174008060	75w Driver Constant voltage 24V Triac		
5715174150035	150w Driver Constant voltage 24V Triac		

